


domain, domain class, domain assembly -- the big picture

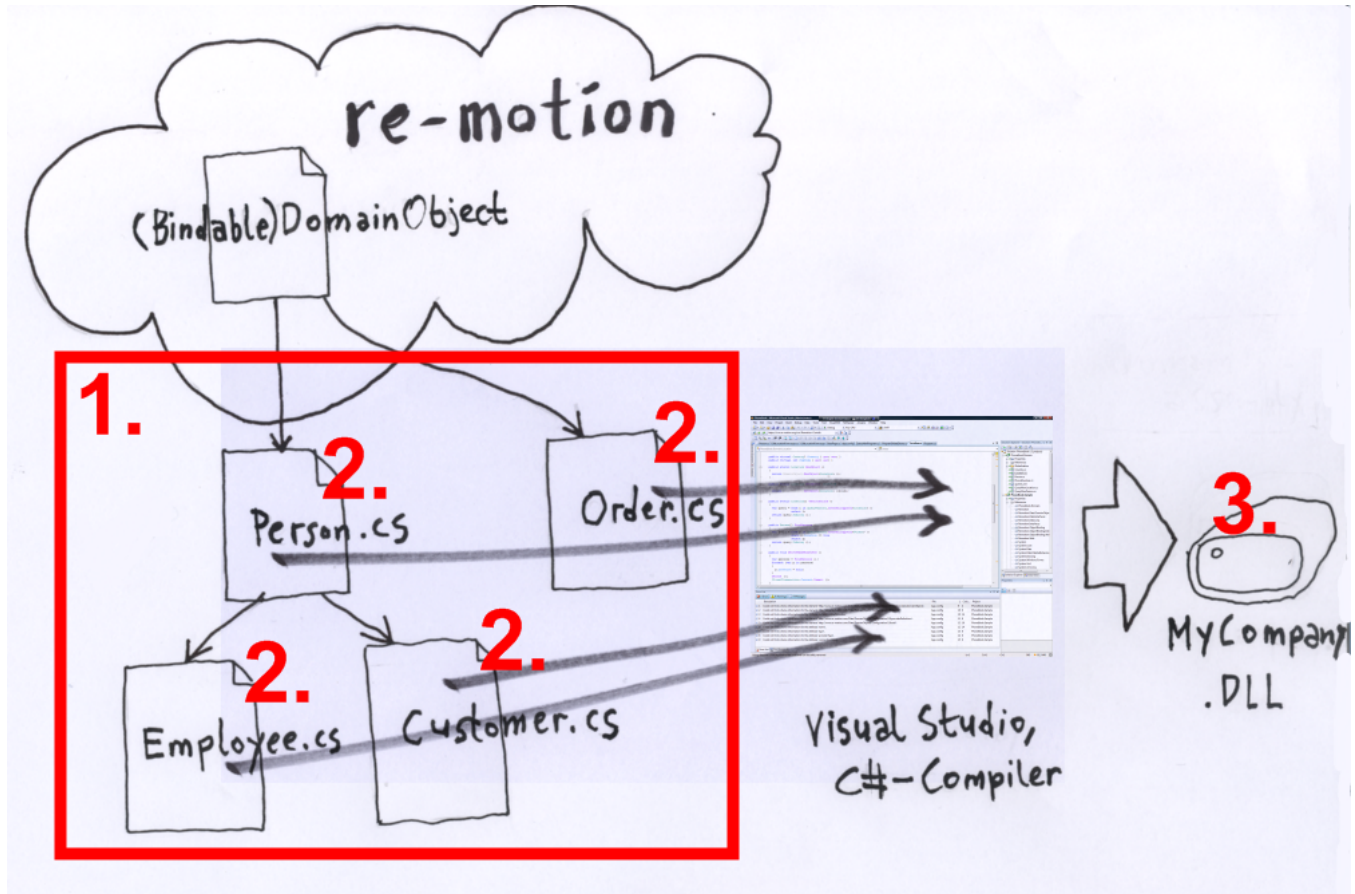

1. You program what your application is all about in the "domain". The entirety of the [domain object classes](#) constitutes the domain.
2. [Domain object classes](#) (a.k.a. [domain classes](#)) are derived from re-motion's base-class `DomainObject`, or `BindableDomainObject`.
3. The compiled domain results in the [domain assembly](#).